




Digilube Systems, Inc.
216 East Mill St.
Springboro, Ohio 45066; USA
1-800-837-5667 www.airid.com

Moisture Minder E-Drain Valve

THE BEST JUST GOT BETTER

The Moisture Minder All-In-One Drain Valve is now available with full on-board controls. This unit is designed with the near-zero air loss feature of our standard Moisture Minder product, along with a built-in timer. The new Moisture Minder is ideal for all drain operations (Receiver Tanks, Drip Legs, Separators, Dryers, Aftercoolers). Unit is internally pilot operated with cycle time adjustability from 1 to 120 minutes.

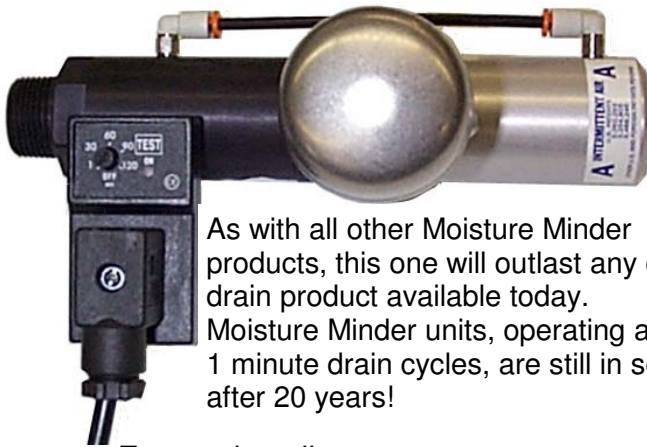

As with all other Moisture Minder products, this one will outlast any other drain product available today. Moisture Minder units, operating at 1 minute drain cycles, are still in service after 20 years!

- Easy to install
- Adjustable timer: 1 min. to 120 min.
- LED light to show when drain is cycling
- Test button with light
- 6-foot 110V cord
- No external pilot required
- Internal strainer with sediment chamber
- Manual clean-out valve
- Mounts anywhere, does not need to be below your compressor
- Maximum working pressure: 230 PSI
- Maximum operating temperature: 200° F

Specifications	
Inlet Port Size	1/4 NPT
Pilot Port Size	1/4 NPT
Drain Port Size	1/8 NPT
Length	7.75"
Width	4.75"
Weight	2.5 Lbs.

United States patents
 3,282,293
 3,254,805
 3,489,246

Discharge Rates	
1-Min. Timer Cycle	1.2 Gallons/hour
2-Min. Timer Cycle	.58 Gallons/hour
5-Min. Timer Cycle	.23 Gallons/hour
10-Min. Timer Cycle	.12 Gallons/hour

Part #	Description
J-143-0000	Moisture Minder® E-Drain unit w/On-board Controller
J-0317	Moisture Minder® E-Drain unit w/On-Board Controller, includes deluxe installation kit for receiver tank
J-0102	Installation Kit for Drip Leg or Air Drop (does not include E-Drain)